

TAYLOR STUDWELDING SYSTEMS LIMITED.

OPERATING MANUAL FOR
CAPACITOR DISCHARGE
MINI PISTOL
AND
MINI PISTOL +



INDEX

PAGE	CONTENT
3	GENERAL INFORMATION
4	INTRODUCTION
5	SAFETY
7	SETTING UP
8	EXPLODED VIEWS & PARTS LISTS
10	AVAILABLE ACCESSORIES
11	EC DECLARATION OF CONFORMITY



GENERAL INFORMATION

MANUFACTURERS DETAILS

TAYLOR STUDWELDING SYSTEMS LIMITED
COMMERCIAL ROAD
DEWSBURY
WEST YORKSHIRE
WF13 2BD
ENGLAND

TELEPHONE : +44 (0)1924 452123
FACSIMILE : +44 (0)1924 430059
e-mail : info@taylor-studwelding.com

TECHNICAL TEL : +44 (0)1924 487703
SALES TEL : +44 (0)1924 487701

PURPOSE AND CONTENT OF THIS MANUAL

This manual has been written for :

- ☞ The operator of the welding machine.
- ☞ The personnel of the final customer responsible for the installation and operation of the machine.

This manual contains information on :

- ☞ Installation and connection
- ☞ Operation.
- ☞ Technical data.
- ☞ Spare parts.
- ☞ Accessories.

FURTHER INFORMATION

Should you require additional technical information, please contact us directly (details above) or our local agent / distributor (details of agents etc. can be obtained from us).

This manual contains important information which is a pre-requisite for safe operation of the equipment. The operating personnel must be able to consult this manual. In the interests of safety, make this manual available to your personnel in good time.

If the equipment is sold / passed on, please hand over this manual to the new owner. Please immediately inform us of the name and address of the new owner, in case we need to contact him regarding the safety of the device.



Please read this manual carefully before installation of the machine.



Please especially observe the safety instructions.

INTRODUCTION

INTRODUCTION

The complete range of Taylor Studwelding Systems Capacitor Discharge units are compact, portable Stud Welding equipment's. The units are specifically designed to enable a small diameter range of ferrous and non-ferrous weld studs to be welded to light gauge, self-finish or pre-coated materials, in most cases with little or no reverse marking.

A standard equipment consists of a control unit, a welding pistol and the necessary interconnecting cables and accessories.

THE PROCESS

Capacitor Discharge stud welding is a form of welding in which the energy required for the welding process is derived from a bank of charged capacitors. This stored energy is discharged across the gap between the two surfaces to be welded as they are propelled towards each other. The arc produced heats the two surfaces, melting a thin film of metal on each surface and the propelling force closes the gap between the two faces, thus forming a weld.

In contact welding the stud to be welded is forced by spring pressure on to the plate. At this point the arc gap between the two components is maintained by a small pip on the welding face of the stud. On initiation of the high current pulse from the capacitors, this pip vaporises and an arc is drawn between the work piece and the stud. The heat from this arc melts the base of the stud and the area of the work piece directly beneath the stud, whilst the spring pressure from the pistol accelerates the towards the work piece. Within 3 to 4 milliseconds the stud hits the work piece and the arc is extinguished. The kinetic energy contained in the moving stud and the remaining spring pressure, forge the molten parts together to form a weld.

SAFETY

PROTECT YOURSELF AND OTHERS !

Read and understand these safety notices.

1. ELECTRICAL

No portion of the outer cover of the welding controller should be removed by anyone other than suitably qualified personnel and never whilst mains power is connected. ALWAYS disconnect the mains plug from the socket.



RISK TO LIFE !!!

BE AWARE ! Capacitors store electrical energy. Check for residual charge before carrying out any internal maintenance.

DO NOT ! use any fluids to clean electrical components as these may penetrate into the electrical system

Installation must be according to the setting up procedure detailed on page 6 of this manual and must be in line with national, regional and local safety codes.

2. FIRE

During welding small particles of very hot metal are expelled. Ensure that no combustible materials can be ignited by these.

3. PERSONNEL SAFETY

Arc rays can burn your eyes and skin and noise can damage your hearing. Operators and personnel working in close proximity must wear suitable eye, ear and body protection. Fumes and gases can seriously harm your health. Use the equipment only in a suitably ventilated area. If ventilation is inadequate, then appropriate fume extraction equipment must be used. Hot metal spatter can cause fire and burns. Appropriate clothing must be worn. Clothing made from, or soiled with, combustible materials must NOT be worn. Have a fire extinguisher nearby and know how to use it. Magnetic fields from high currents can affect heart pacemakers or other electronically controlled medical devices. It is imperative that all personnel likely to come into the vicinity of any welding plant are warned of the possible RISK TO LIFE before entering the area.

4. MAINTENANCE

All cables must be inspected regularly to ensure that no danger exists from worn or damaged insulation or from unsound electrical connections. Special note should be made of the cables close to the pistol, where maximum wear occurs. As well as producing inconsistent welds, worn cables can overheat or spark, giving rise to the risk of fire.

5. TRAINING

Use of the equipment must be limited to authorised personnel only who must be suitably trained and must have read and understood this manual. This manual must be made available to all operators at all times. Further copies of this manual may be purchased from the manufacturer. Measures must be taken to prevent the use of this equipment by unauthorised personnel.

6. INSTALLATION

Ensure that the site chosen for the equipment is able to support the weight of the equipment and that it will not fall or cause a danger in the course of its normal operation. Do not hang connecting cables over sharp edges and do not install connecting cables near heat sources or via traffic routes where people may trip over them or they may be damaged by the passage of vehicles (forklifts etc.).

7. INTERFERENCE

During welding operations, intense magnetic and electrical fields are unavoidably produced and these may interfere with other sensitive electronic equipment. As previously mentioned, all personnel wearing heart pacemakers or other electronically controlled medical devices must be kept well away from any welding operations. The welding equipment should be installed at least 5 metres away from any computer equipment to minimise any possible interaction. Note that cables carrying signals between electronic devices are also capable of picking up interference which may modify the way in which those devices function and therefore should be sited outside the 5 metre zone. Do not place objects which are sensitive to magnetism near the welding area, wristwatches, credit cards, computer disks etc. may all be rendered useless. The welding equipment, like all other welding equipment, is itself electronically sensitive and its position relative to other radiation emitting equipment (mobile phones, remote controls, motor speed controllers etc.) must be considered.

8. DISPOSAL

The equipment either wholly or any of its component parts may be disposed of as part of general industrial waste or passed to a scrap merchant. Non of the components used in the manufacture are toxic, carcinogenic or harmful to health.

SETTING UP





SETTING UP

Select the required chuck for the diameter of stud you need to weld (a selection table can be found on page 10 of this manual). Note that there is no stud depth backstop as in a standard chuck. This is because this type of chuck is designed to allow the stud flange to rest against the front face.

As part of the design of this pistol, the chuck is effectively the shaft of the pistol. This helps reduce overall length, but makes fitting/changing the chuck a more complicated procedure than in a normal CD pistol.

As can be seen from the explosion and cross-sectional views below one central screw holds everything together. Failure to properly tighten the screw (1) into the chuck (2) may cause internal arcing and subsequent failure.

Please note that due to this, failures of this type are regarded as improper maintenance and are not covered by the product warranty.

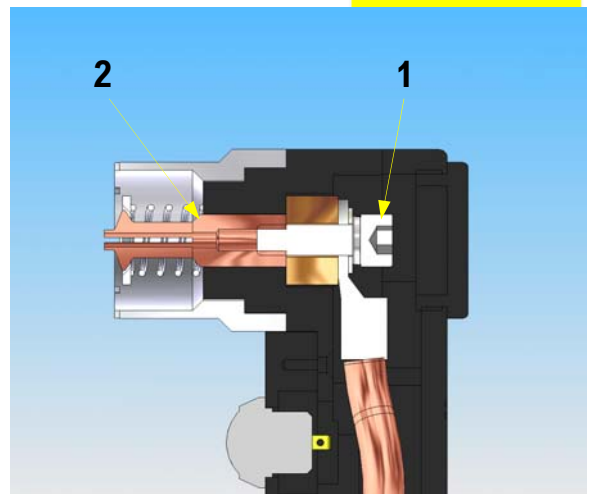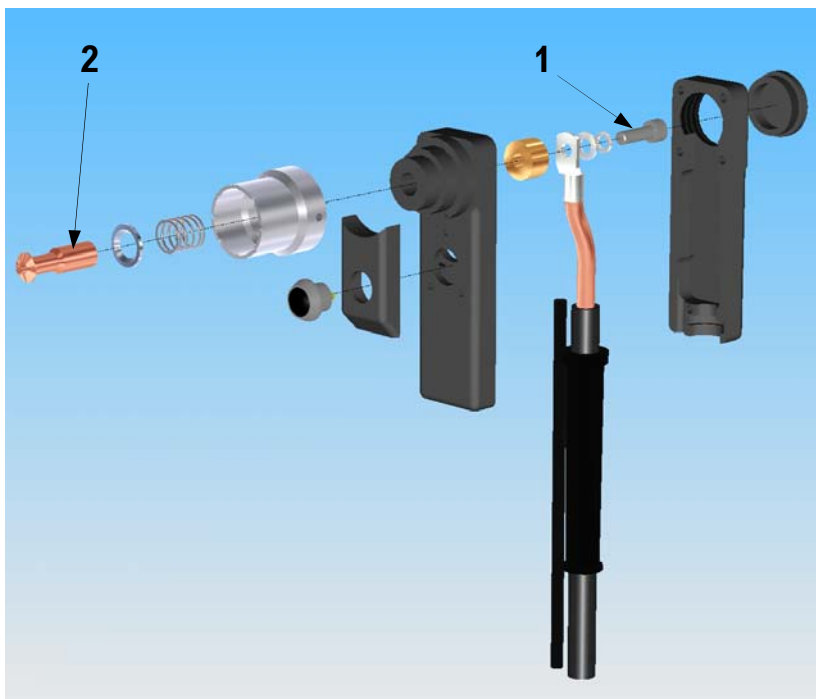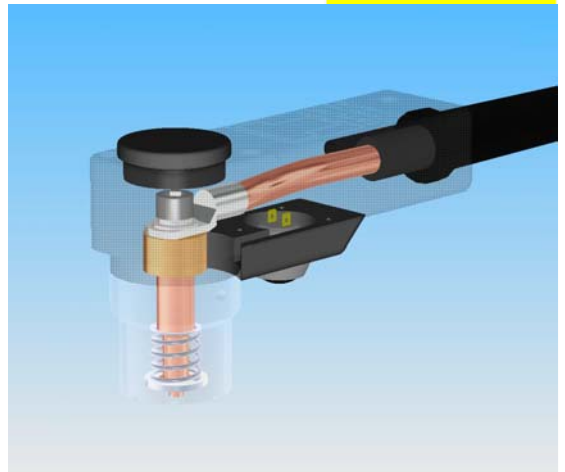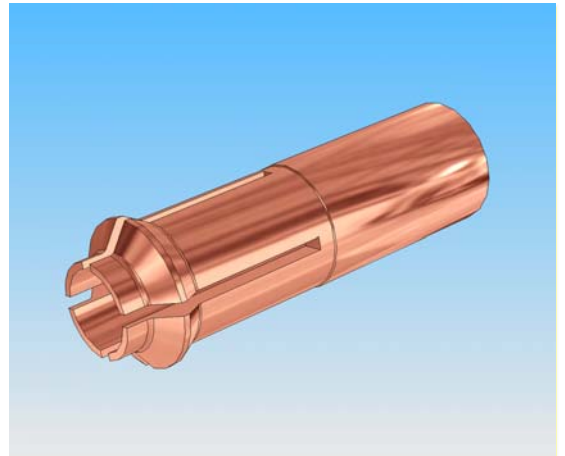

SETTING UP

SETTING UP

The standard mini pistol is designed to weld a range of studs covering the diameters M3 to M8 in lengths from 4 to 20 mm.


It is possible to weld longer studs but this would compromise the overall length of the pistol which may cause issues when attempting to weld in tight spaces also because it would be impossible to properly seat the nose cone, it would not be possible to ensure that studs have been welded perpendicular to the component surface.

A mini pistol + is available to weld studs of diameter M10 with an adjustable nose cone allowing lengths up to 30 mm to be welded.

The method of changing/fitting the chuck is the same for both pistols and as such is covered by the same provisions as specified on the previous page.



EXPLOSION & PARTS LISTING

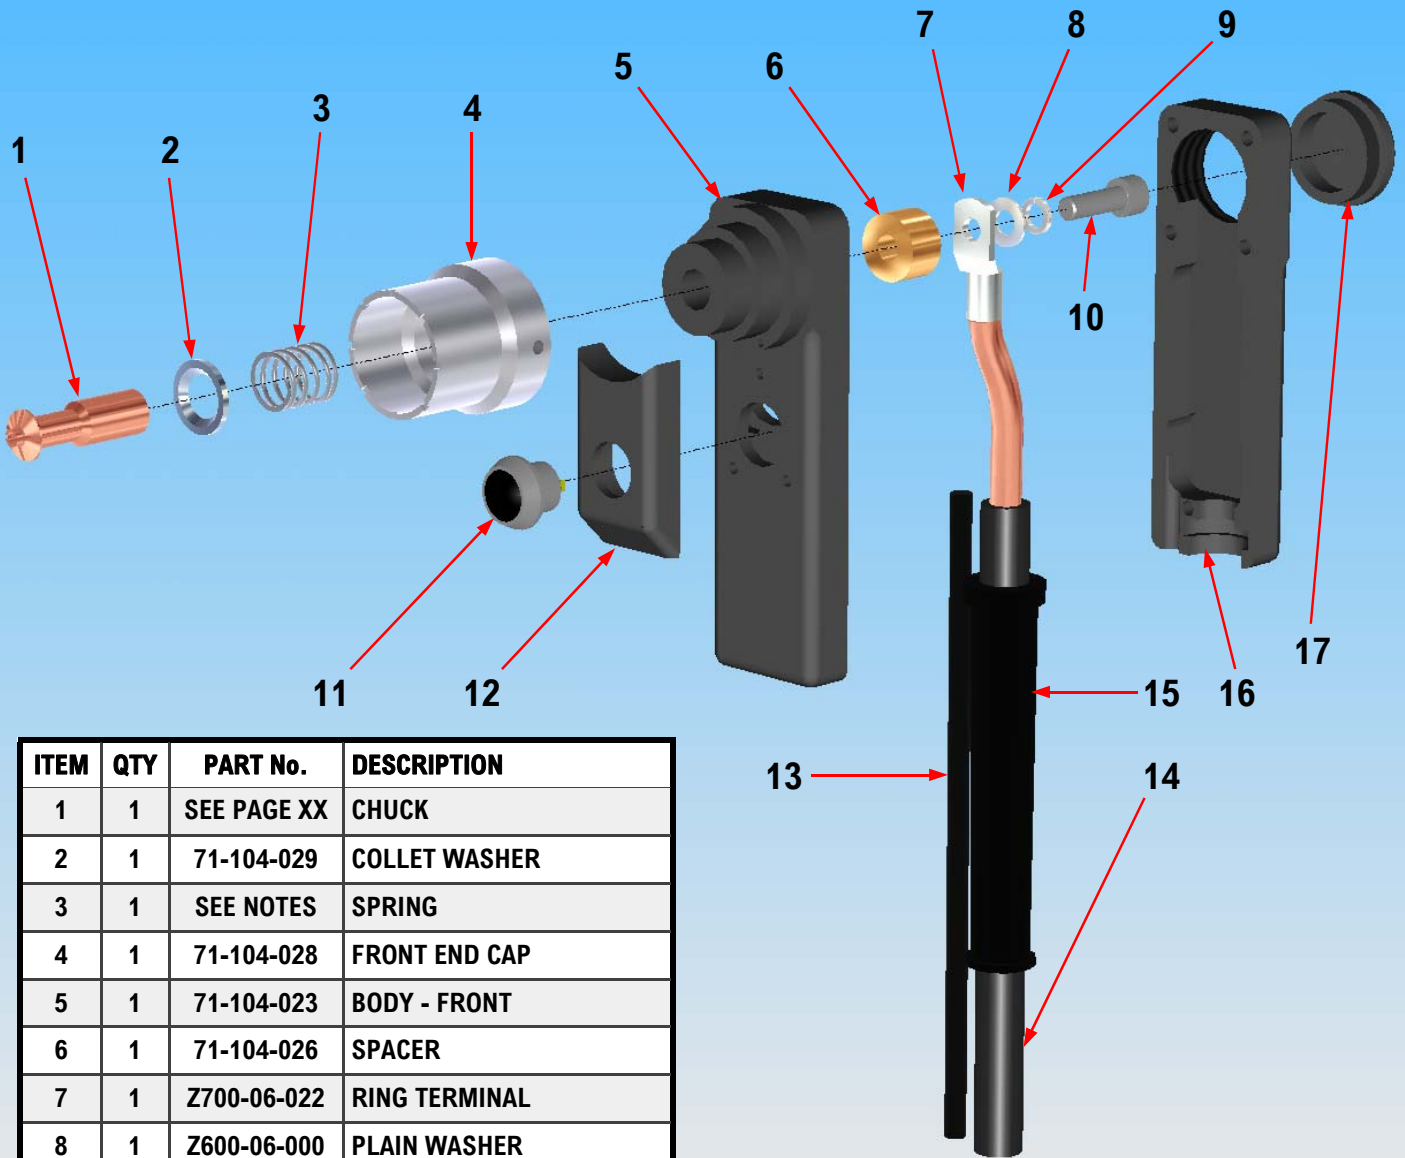

ITEM	QTY	PART No.	DESCRIPTION
1	1	SEE PAGE XX	CHUCK
2	1	71-104-029	COLLET WASHER
3	1	SEE NOTES	SPRING
4	1	71-104-028	FRONT END CAP
5	1	71-104-023	BODY - FRONT
6	1	71-104-026	SPACER
7	1	Z700-06-022	RING TERMINAL
8	1	Z600-06-000	PLAIN WASHER
9	1	Z615-06-000	SPRING WASHER
10	1	Z100-06-020	SCREW
11	1	71-104-019	TRIGGER SWITCH
12	1	71-104-025	SWITCH HOUSING
13	3.5	71-300-010	CONTROL CABLE - m
14	3	71-300-002	WELD CABLE - m
15	1	71-101-034	CABLE SUPPORT SLEEVE
16	1	71-104-024	BODY - REAR
17	1	71-104-027	REAR END CAP
18	1	71-101-030	CONTROL PLUG
19	7	71-101-032	CABLE TIE
20	1	SEE NOTES	WELD PLUG

ITEM 3 IS DEPENDENT ON MATERIAL BEING WELDED FOR


STEEL USE 71-104-030
ALUMINIUM USE 71-104-031

ITEMS 18, 19 & 20 NOT SHOWN

ITEM 20 IS DEPENDENT ON WELDING CONTROLLER MODEL FOR

CD-M USE 81-101-051
CD200 USE 71-101-031

EXPLOSION & PARTS LISTING

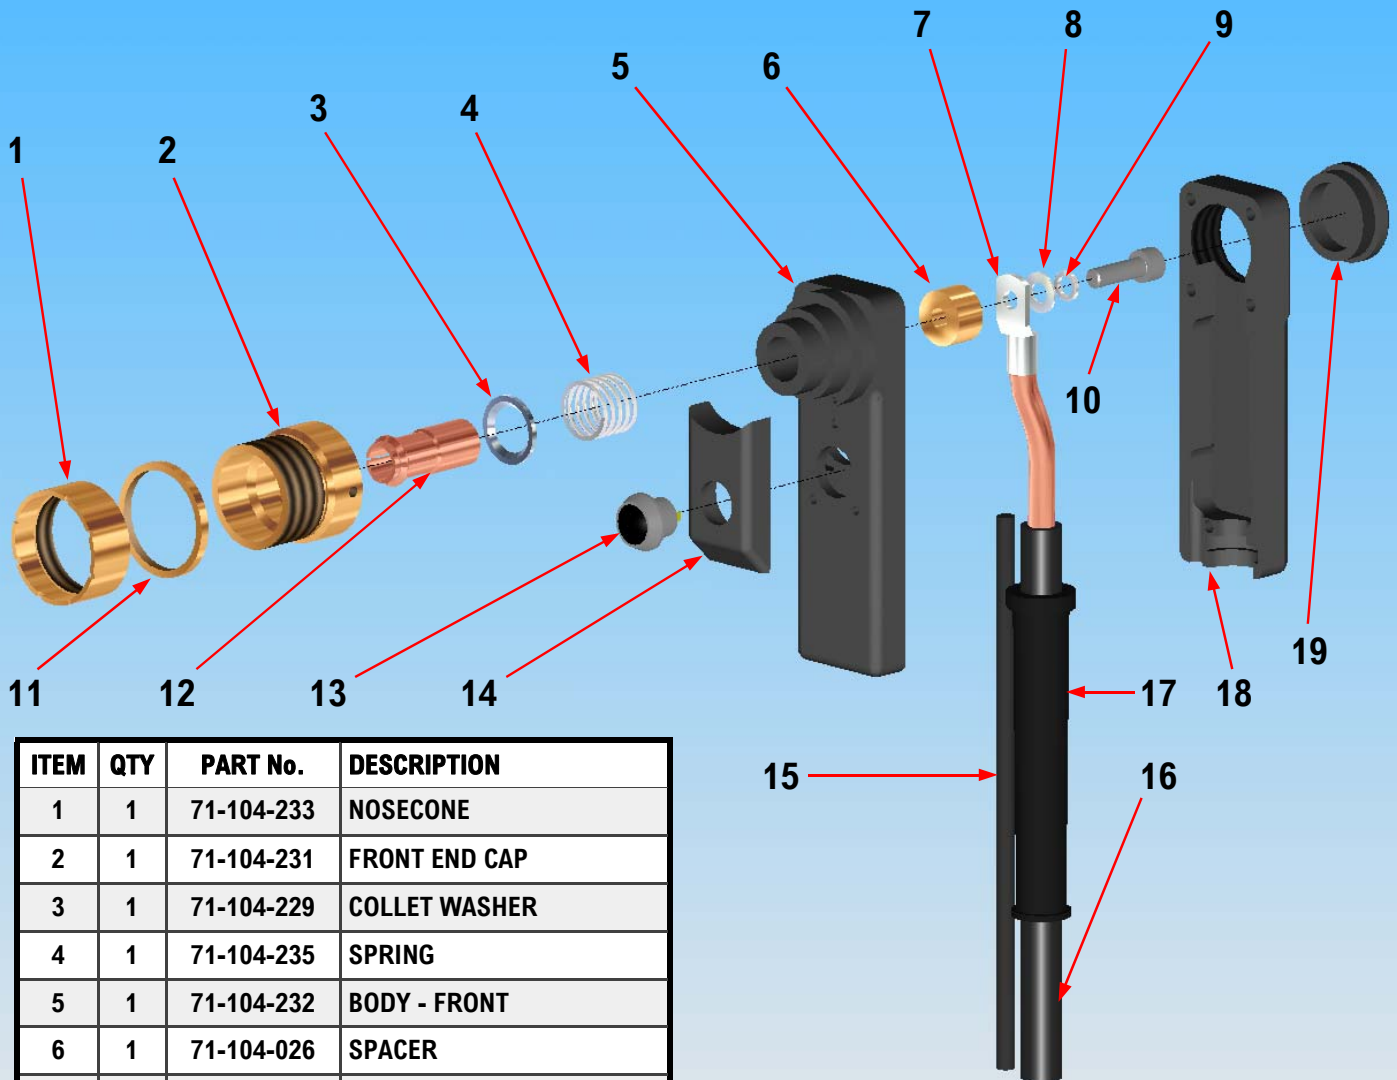

ITEM	QTY	PART No.	DESCRIPTION
1	1	71-104-233	NOSECONE
2	1	71-104-231	FRONT END CAP
3	1	71-104-229	COLLET WASHER
4	1	71-104-235	SPRING
5	1	71-104-232	BODY - FRONT
6	1	71-104-026	SPACER
7	1	Z700-06-022	RING TERMINAL
8	1	Z600-06-000	PLAIN WASHER
9	1	Z615-06-000	SPRING WASHER
10	1	Z100-06-020	SCREW
11	1	71-104-234	LOCKING RING
12	1	SEE PAGE XX	CHUCK
13	1	71-104-019	TRIGGER SWITCH
14	1	71-104-025	SWITCH HOUSING
15	3.5	71-300-010	CONTROL CABLE - m
16	3	71-300-002	WELD CABLE - m
17	1	71-101-034	CABLE SUPPORT SLEEVE
18	1	71-104-024	BODY - REAR
19	1	71-104-027	REAR END CAP

ITEMS 20, 21 & 22 NOT SHOWN

ITEM 22 IS DEPENDENT ON WELDING CONTROLLER MODEL


ITEM	QTY	PART No.	DESCRIPTION
20	1	71-104-030	CONTROL PLUG
21	7	71-101-032	CABLE TIE
22	1	71-101-031	WELD PLUG - CD200
or	1	81-101-051	WELD PLUG - CD-M

ACCESSORIES

CHUCKS


MINI PISTOL

DESCRIPTION	PART NUMBER
M3 CHUCK	40-17714
M4 CHUCK	40-17722
M5 CHUCK	40-17730
M6 CHUCK	40-17749
Ø7.1 CHUCK	40-17854
M8 CHUCK	40-17862

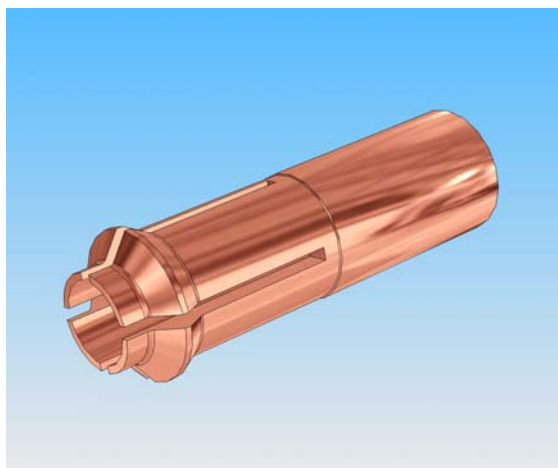

MINI PISTOL +

DESCRIPTION	PART NUMBER
M10 CHUCK	71-104-210

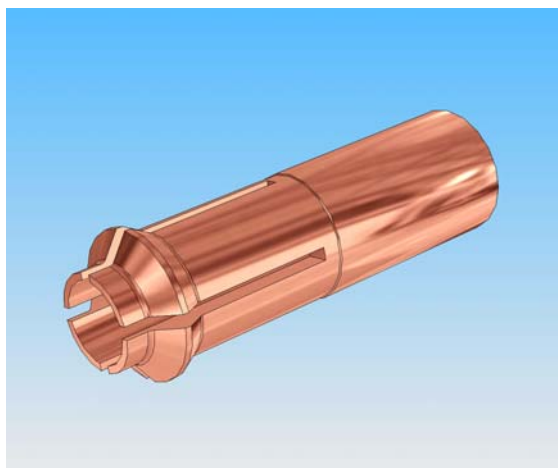

EC DECLARATION OF CONFORMITY

TAYLOR STUDWELDING SYSTEMS LIMITED

COMMERCIAL ROAD
DEWSBURY
WEST YORKSHIRE
ENGLAND
WF13 2BD

TEL : +44 (0)1924 452123

FAX : +44 (0)1924 430059

EMAIL : sales@taylor-studwelding.com

STATEMENT : This is to certify that the machinery listed below is designed and manufactured in conformance with all applicable health and safety regulations.

This statement is invalid if any modifications are carried out on the machinery without the prior written approval of Taylor Studwelding Systems Ltd.

DESCRIPTION OF MACHINE : Drawn Arc Studwelding Equipment
TYPE : 1200DA
PART NUMBER : 99-102-008

Applicable EC guidelines and corresponding standards:

- Low voltage guideline 73/23/EEC:

EN60204-1 Safety of machinery - Electrical equipment of machines.

- EMC guidelines 89/336/EEC (electromagnetic compatibility):

EN50081 Electromagnetic compatibility - Generic emission standard

EN50082 Electromagnetic compatibility - Generic immunity standard

EN50199 Electromagnetic compatibility (EMC) Product standard for Arc welding equipment

- Machine guidelines 89/392/EEC

EN60974-1 Arc welding equipment : Electromagnetic compatibility (EMC) requirements






SIGNED



DAVID TAYLOR
MANAGING DIRECTOR





DO NOT SCALE DRAWING. REMOVE ALL BURRS AND SHARP EDGES UNLESS STATED OTHERWISE. IF IN DOUBT ASK. DIMENSIONS IN mm. THIRD ANGLE PROJECTION.

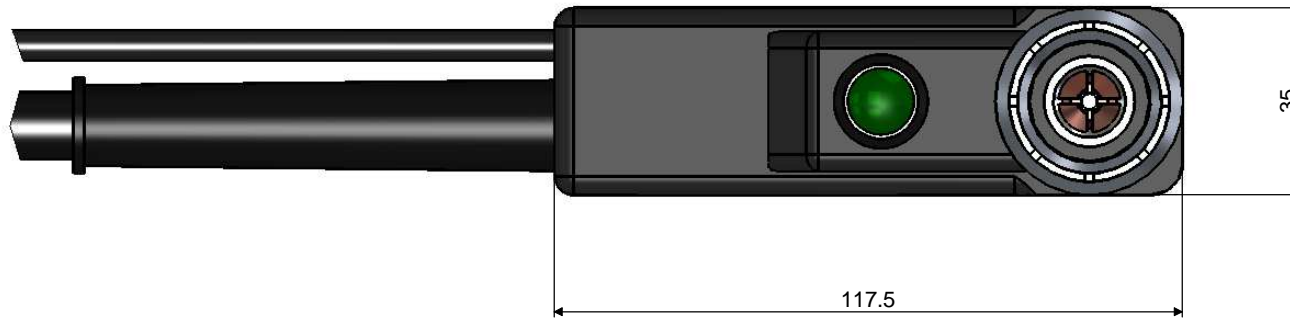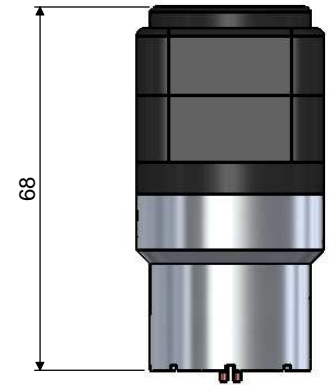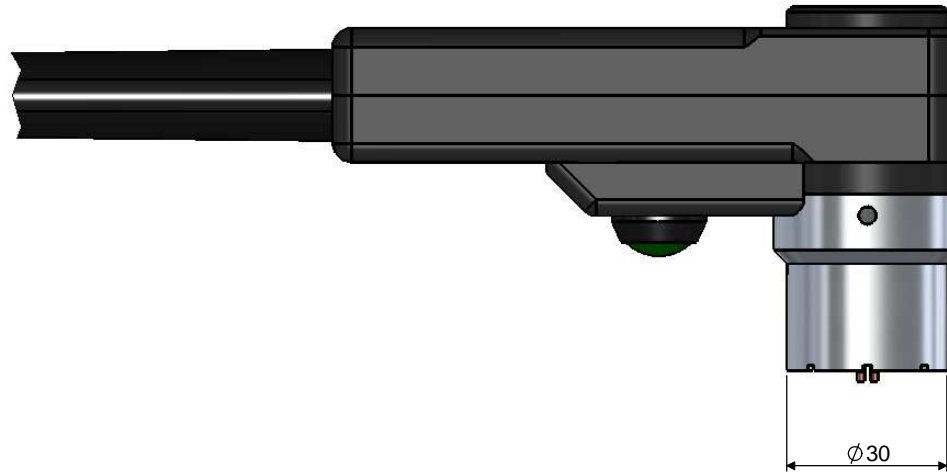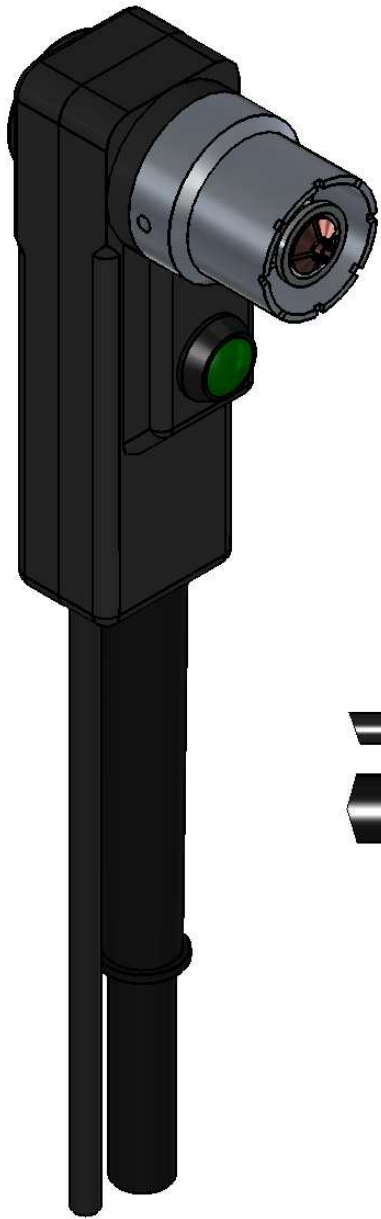

REVISIONS	<p>MACHINING SURFACE FINISH TO BE 3.2/CLA UNLESS STATED.</p> <p>UNSPECIFIED TOLERANCES MACHINED : ±0.25mm PER 250mm UNMACHINED : ±0.5mm PER 250mm HOLE CENTRES : ±0.25mm THREADS TO BS3643 PART 2 WELDING AS ISO 2553-1974</p>		MATERIAL :- N/A	DRN :- D. PEAKER	TITLE :- MINI CD PISTOL Mk2
			PROTECTIVE FINISH :- NONE.	DATE :- 2/6/2004	MODEL OR CLASSIFICATION :-
			HEAT TREATMENT :- NONE.	SCALE :- 1:1	COMPONENT CODE NUMBER :-
			<p>THIS DRAWING IS CONFIDENTIAL AND IS THE PROPERTY OF TAYLOR STUDWELDING SYSTEMS LTD IT MUST NOT BE REPRODUCED OR TRANSMITTED TO A THIRD PARTY WITHOUT OUR WRITTEN CONSENT. COPYRIGHT CLAIMED ©2003</p>		<p>99-100-026</p>
					SHEET 1 OF 2

DO NOT SCALE DRAWING. REMOVE ALL BURRS AND SHARP EDGES UNLESS STATED OTHERWISE. IF IN DOUBT ASK. DIMENSIONS IN mm. THIRD ANGLE PROJECTION.

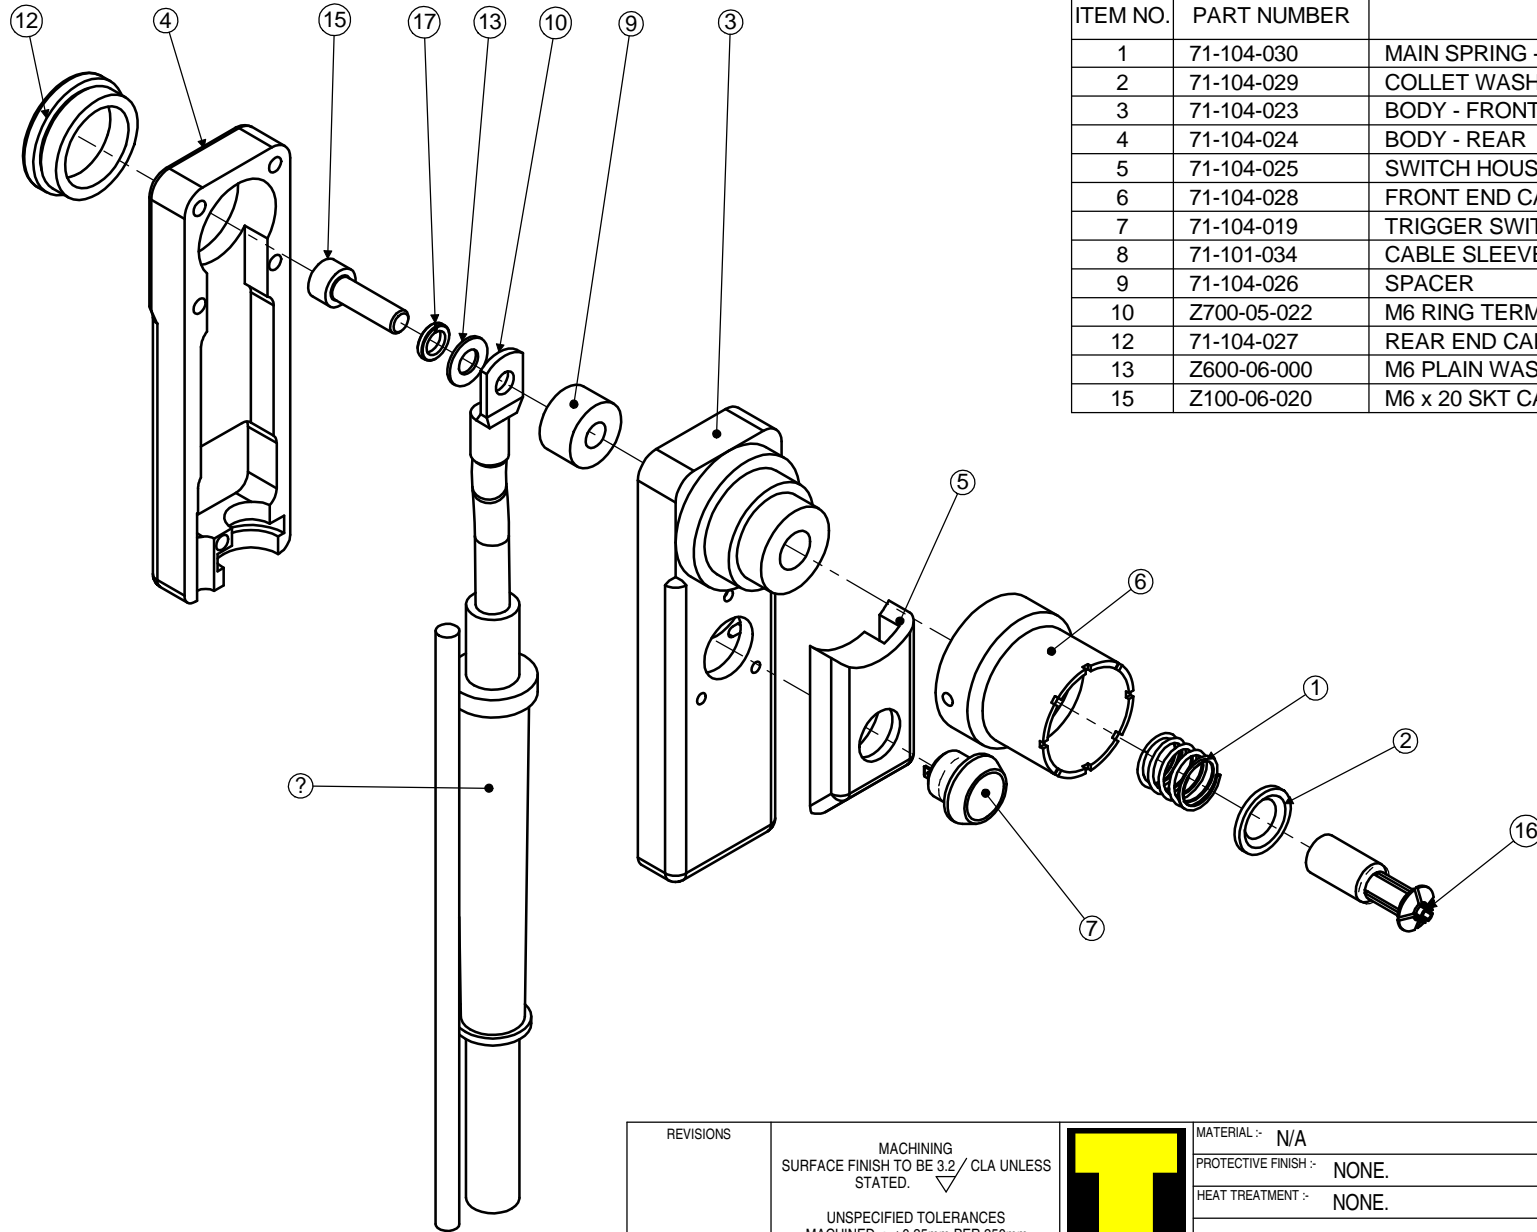

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	71-104-030	MAIN SPRING - STEEL (FOR ALUMINIUM USE 71-104-031)	1
2	71-104-029	COLLET WASHER	1
3	71-104-023	BODY - FRONT	1
4	71-104-024	BODY - REAR	1
5	71-104-025	SWITCH HOUSING	1
6	71-104-028	FRONT END CAP	1
7	71-104-019	TRIGGER SWITCH	1
8	71-101-034	CABLE SLEEVE	1
9	71-104-026	SPACER	1
10	Z700-05-022	M6 RING TERMINAL	1
12	71-104-027	REAR END CAP	1
13	Z600-06-000	M6 PLAIN WASHER	1
15	Z100-06-020	M6 x 20 SKT CAP HEAD SCREW	1

REVISIONS

MACHINING
SURFACE FINISH TO BE 3.2 / CLA UNLESS STATED.

UNSPECIFIED TOLERANCES
MACHINED : ±0.25mm PER 250mm
UNMACHINED : ±0.5mm PER 250mm
HOLE CENTRES : ±0.25mm
THREADS TO BS3643 PART 2
WELDING AS ISO 2553-1974



MATERIAL :- N/A
PROTECTIVE FINISH :- NONE.
HEAT TREATMENT :- NONE.

DRN :- D. PEAKER
DATE :- 2/6/2004
SCALE :- 1:1.25

TITLE :- **MINI CD PISTOL Mk2**

MODEL OR CLASSIFICATION :-
COMPONENT CODE NUMBER :-

THIS DRAWING IS CONFIDENTIAL AND IS THE PROPERTY OF
TAYLOR STUDWELDING SYSTEMS LTD
IT MUST NOT BE REPRODUCED OR TRANSMITTED TO A THIRD PARTY WITHOUT OUR WRITTEN CONSENT.
COPYRIGHT CLAIMED ©2003

99-100-026